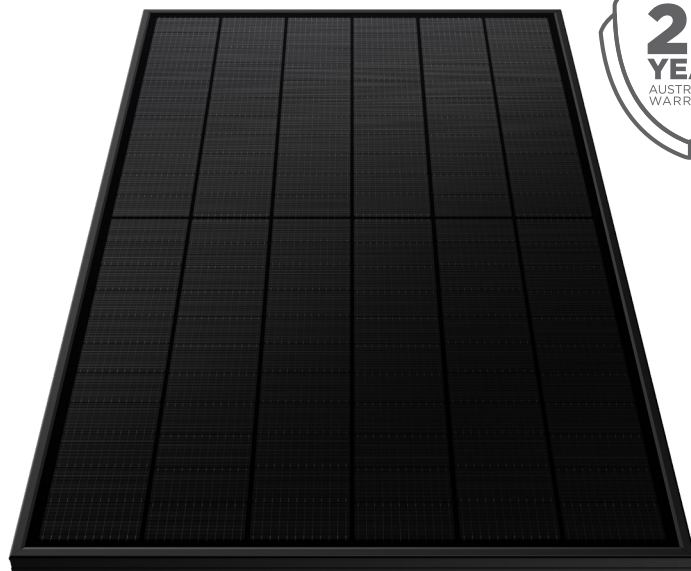


SOLAR POWER PANELS



SILHOUETTE 400W SOLAR POWER PANELS



The new ultimate-performance Solahart Silhouette panel, with stylish all-black appearance, is the ideal solution for Australian homes thanks to its innovative and premium cell technology.

The state-of-the-art PERC monocrystalline half-cell and 12-busbar design was developed to achieve excellent performance under real conditions, even with low radiation intensity and on clear, hot summer days. The new zero-gap layout boosts panel efficiency to up to 20.4%.

The black anodised aluminium frame has been built to withstand extreme weather conditions, including high winds, and reliable silicone connections ensure excellent stability and durability. Other features include optimally positioned drainage holes to protect against frost damage, premium MC4 connecting plugs to secure a reliable connection, and a sealed junction box that offers corrosion protection and water resistance.

The exceptional 25-Year Solahart Product Warranty provides ultimate confidence and peace of mind. Solahart Silhouette is designed in Germany, manufactured in Korea and only available through Solahart.

How you benefit:



MODERN DESIGN

Combining premium technology with a contemporary design and a striking all-black finish



HIGH SOLAR YIELD

Innovative gapless technology with excellent low-light and temperature behaviour results in more energy production per square metre.



HIGH PERFORMANCE

Long-term yield security with anti-LID technology, anti-PID Technology[^], Hot-Spot Protect and Solahart Quality Auditing.



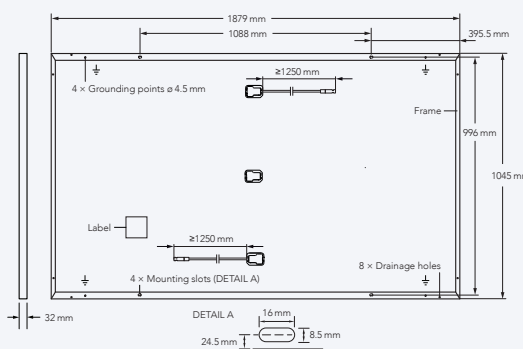
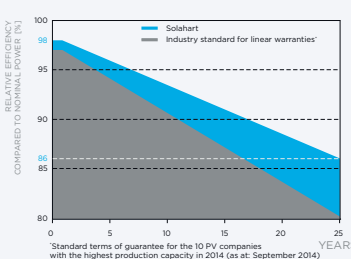
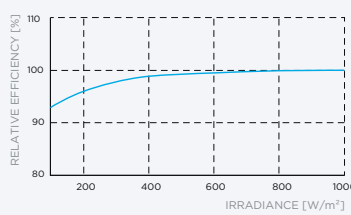
EXTREME WEATHER RATED

High-tech aluminium alloy frame, certified for high wind loads and snow loads.



SOLAHART WARRANTY

25-Year Solahart Product Warranty for peace of mind, plus, 25-Year Manufacturer's Performance Guarantee.*

Model	SOLAHART400S3	
Mechanical Data		
Dimensions (H x W x D)	1879 x 1045 x 32 mm (including frame)	
Weight	22.0 Kg	
Front Cover	3.2 mm thermally pre-stressed glass with anti-reflection technology	
Back Cover	Composite film	
Frame	Black Anodised Aluminium	
Cell	6 x 22 monocrystalline solar half-cells	
Junction Box	Protection class ≥ IP67, with bypass diodes	
Cable	4 mm ² solar cable; (+) 1250 mm, (-) 1250 mm	
Connector	Stäubli MC4 connectors (PV-KST4 & PV-KSB4), IP68	
		
Electrical Data		
Minimum performance at standard test conditions, STC ⁽¹⁾ (Power Tolerance +5 W / -0 W)		
Power at MPP ⁽²⁾ - PMPP	400 Wp	
Short circuit current ⁽²⁾ - Isc	11.14 A	
Open circuit voltage ⁽²⁾ - Voc	45.30 V	
Current at MPP [#] - IMPP	10.77 A	
Voltage at MPP [#] - VMPP	37.13 V	
Efficiency ⁽¹⁾ - η	≥20.4 %	
Minimum performance at normal operating conditions, NMOT ⁽³⁾		
Power at MPP - PMPP	300.1 Wp	
Short circuit current [#] - Isc	8.97 A	
Open circuit voltage [#] - Voc	42.72 V	
Current at MPP [#] - IMPP	8.51 A	
Voltage at MPP [#] - VMPP	35.25 V	
Other information		
Part Number	SOLAHART400S3	
Solahart Product Warranty*	25 years	
Manufacturer's Performance Guarantee*	25 years	
Country of Manufacture	Korea	
Temperature Coefficients		Performance Guarantee
Normal module operating temperature (NMOT)	43±3 °C	 At least 98% of nominal power during the first year. Thereafter max 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years. All data within measurement tolerances.
Temperature coefficient of PMPP - γ	-0.34 % / °C	
Temperature coefficient of Voc - β	-0.27 % / °C	
Temperature coefficient of Isc - α	+0.04 % / °C	
Qualifications and Certificates		
IEC 61215: 2016; IEC 61730: 2016, Application class II.		
Properties for System Design		
Permitted module temp on continuous duty	-40°C up to +85°C	
Maximum system voltage - VSYS	1000 V	
Maximum reverse current - IR	20 A	
Maximum design load, Push / Pull	3600 / 2660 Pa	
Maximum test load, Push / Pull	5400 / 4000 Pa	
Safety class	II	
Fire rating based on ANSI / UL 61730	C / TYPE 2	
 Typical panel performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m²).		

Specifications and designs included in this data sheet are subject to change without notice.

⁽¹⁾1000 W/m², 25 $\pm$ 2°C, AM 1.5 G.

⁽²⁾Measurement tolerances PMPP ± 3 %; ISC, VOC ± 5 % at STC.

⁽³⁾800 W/m², NMOT, spectrum AM 1.5 G. # Typical values, actual values may differ.

*For full details see Solahart Owner's Guide & Installation Instructions.

^APT test conditions according to IEC/TS 62804-1:2015, method B (-1500 V, 168 h).