

# SOLAR POWER PANELS



## SOLAHART SUNCELL RESIDENTIAL SOLAR PANELS

SOLAHART410V2



The new high-performance Solahart SunCell panel not only offers great value, but it's also custom-designed and built to Solahart's strict quality specifications. Offering positive tolerance of up to 5W guarantees that each SunCell panel will have a rated maximum power on or above 410W at Standard Test Conditions (STC)<sup>(1)</sup>.

With an attractive black frame design, this panel is easy to install and maintain, and is well suited to Australian roof designs. Solahart SunCell also ticks all the boxes on durability, it has passed endurance testing of up to three times more cycles than the international standard, making it an ideal solution in Australia's harsh conditions. Reliable silicone connections also ensure excellent stability and durability.

Other features include genuine Stäubli MC4 EVO2 connectors to secure a reliable connection and a sealed junction box that offers corrosion protection and water resistance.

Every Solahart system is backed by a trusted Solahart Australia Warranty that offers the advantage of local on-the-ground support to deliver true peace of mind. With 70 years of solar experience and over 60 Dealerships across Australia, we're here for the long haul.

### How you benefit:



#### DURABLE DESIGN

Blending state of the art technology and quality construction for excellent performance under real-world conditions.



#### HIGH SOLAR YIELD

Innovative half-cell technology with excellent power efficiency that results in more energy production per square metre.



#### HIGH PERFORMANCE

High energy produced per panel means you pay less for electricity generated.



#### VALUE FOR MONEY


Cost-effective panel solution for a high return on your investment.



#### SOLAHART WARRANTY


15-Year Solahart Product Warranty for peace of mind, plus, 25-Year Performance Guarantee for long term returns.\*

| Model                                                                                             |                                                             | SOLAHART410V2                   |  |
|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------|---------------------------------|--|
| Electrical Data                                                                                   |                                                             |                                 |  |
| Minimum performance at Standard Test Conditions (STC) <sup>(1)</sup> - Power Tolerance: +5 W/-0 W |                                                             |                                 |  |
| Power at MPP <sup>(2)</sup> - P <sub>MPP</sub>                                                    | 410 Wp                                                      |                                 |  |
| Short circuit current <sup>(2)</sup> - I <sub>sc</sub>                                            | 13.88 A                                                     |                                 |  |
| Open circuit voltage <sup>(2)</sup> - V <sub>oc</sub>                                             | 37.40 V                                                     |                                 |  |
| Current at MPP# - I <sub>MPP</sub>                                                                | 13.05 A                                                     |                                 |  |
| Voltage at MPP# - V <sub>MPP</sub>                                                                | 31.43 V                                                     |                                 |  |
| Efficiency <sup>(1)</sup> - η                                                                     | 21%                                                         |                                 |  |
| Minimum performance at normal operating conditions, NMOT <sup>(3)</sup>                           |                                                             |                                 |  |
| Power at MPP - P <sub>MPP</sub>                                                                   | 306.4 Wp                                                    |                                 |  |
| Short circuit current# - I <sub>sc</sub>                                                          | 11.26 A                                                     |                                 |  |
| Open circuit voltage# - V <sub>oc</sub>                                                           | 35.34 V                                                     |                                 |  |
| Current at MPP# - I <sub>MPP</sub>                                                                | 10.46 A                                                     |                                 |  |
| Voltage at MPP# - V <sub>MPP</sub>                                                                | 29.29 V                                                     |                                 |  |
| Other Information                                                                                 |                                                             |                                 |  |
| Part Number                                                                                       | SOLAHART410V2                                               |                                 |  |
| Solahart Product Warranty*                                                                        | 15 years                                                    |                                 |  |
| Performance Guarantee*                                                                            | 25 years                                                    |                                 |  |
| Country of manufacture                                                                            | China                                                       |                                 |  |
| Mechanical Data                                                                                   |                                                             | Performance Guarantee           |  |
| Dimensions (H x W x D)                                                                            | 1722 x 1134 x 30 mm (including frame)                       |                                 |  |
| Weight                                                                                            | 21.6 Kg                                                     |                                 |  |
| Glass thickness                                                                                   | 3.2 mm                                                      |                                 |  |
| Backsheet                                                                                         | White                                                       |                                 |  |
| Frame                                                                                             | Black                                                       |                                 |  |
| Cell                                                                                              | 6 x 18 monocrystalline solar half-cells                     |                                 |  |
| Number of diodes                                                                                  | 3                                                           |                                 |  |
| Junction box                                                                                      | Protection class IP68, with bypass diodes                   |                                 |  |
| Cable                                                                                             | 4 mm <sup>2</sup> solar cable; (+) 1200 mm, (-) 1200 mm     |                                 |  |
| Connector                                                                                         | Stäubli MC4 EVO2 connectors (PV-KST4 EVO 2 & PV-KBT4 EVO 2) |                                 |  |
| Temperature Coefficients                                                                          |                                                             | Dimensions - Measurements in mm |  |
| Normal module operating temp (NMOT)                                                               | 41±2°C                                                      |                                 |  |
| Temp coefficient of P <sub>MPP</sub> - γ                                                          | -0.35%/°C                                                   |                                 |  |
| Temp coefficient of V <sub>oc</sub> - β                                                           | -0.27%/°C                                                   |                                 |  |
| Temp coefficient of I <sub>sc</sub> - α                                                           | +0.045%/°C                                                  |                                 |  |
| Qualifications and Certificates                                                                   |                                                             |                                 |  |
| IEC 61215: 2016; IEC 61730: 2016, Application class II.                                           |                                                             |                                 |  |
| Properties for System Design                                                                      |                                                             |                                 |  |
| Max system voltage - V <sub>sys</sub>                                                             | 1500 V                                                      |                                 |  |
| Max reverse current - I <sub>r</sub>                                                              | 25 A                                                        |                                 |  |
| Max design load, Push/Pull                                                                        | 3600 / 1600 Pa                                              |                                 |  |
| Max test load, Push/Pull                                                                          | 5400 / 2400 Pa                                              |                                 |  |
| Fire rating based on IEC/UL                                                                       | Class C / TYPE 4                                            |                                 |  |

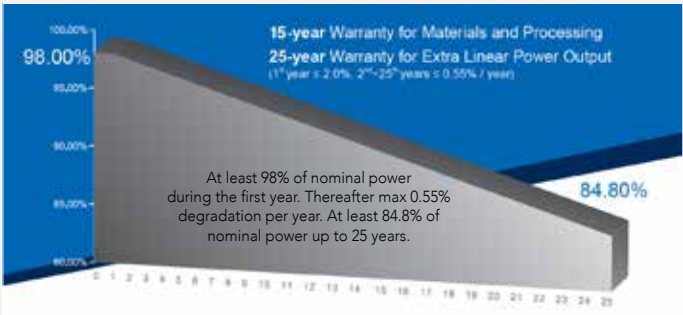

At least 98% of nominal power during the first year. Thereafter max 0.55% degradation per year. At least 84.8% of nominal power up to 25 years.

All data within measurement tolerances.

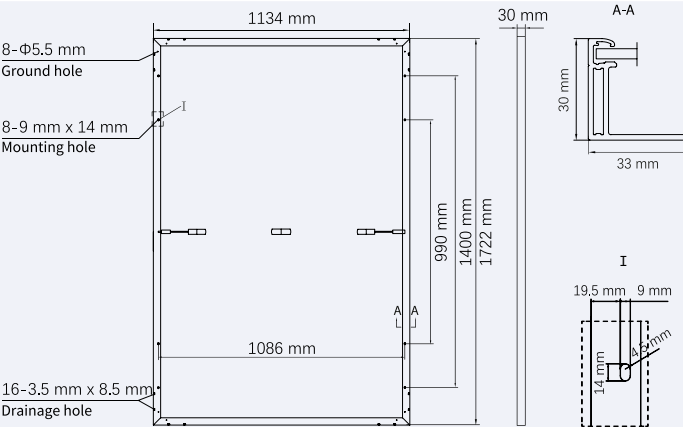

8-Φ5.5 mm Ground hole

8-9 mm x 14 mm Mounting hole

16-3.5 mm x 8.5 mm Drainage hole

A-A

I

Specifications and designs included in this data sheet are subject to change without notice.

<sup>(1)</sup>1000 W/m<sup>2</sup>, 25±2°C, AM 1.5 G. <sup>(2)</sup>Measurement tolerances P<sub>MPP</sub> ±3 %; I<sub>sc</sub>, V<sub>oc</sub> ±5 % at STC. <sup>(3)</sup>800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5 G. \* Typical values, actual values may differ.

\* 15-year Solahart Product Warranty covers certain defects with the Solahart SunCell solar panels. Please refer to the 'Solahart PV Systems Owner's Guide' for full details, available on Solahart's website [www.solahart.com.au](http://www.solahart.com.au). 25-year Performance Guarantee is provided by the manufacturer of the Solahart SunCell solar panels and guarantees the maximum reduction in power output performance of the panels over a 25-year period. Neither the Solahart Product Warranty nor the Performance Guarantee are intended to exclude, restrict or modify your rights under the Australian Consumer Law.

**Solahart Australia 1300 769 475 | [solahart.com.au](http://solahart.com.au)**

Reorder code: SHDS/PV\_SH410\_SUNC

ir4993\_SOLAHART410V2\_SunCell\_March2023